

BrewWISE® Single ThermoFresh® DBC® Brewer

ITEM#

PROJECT

DATE



Single TF DBC with 1.5 gallon TF Servers*
(servers sold separately)

Dimensions: 35.7" H x 12.1" W x 19.2" D
(90.7cm H x 30.7cm W x 48.8cm D)

Features

BrewWISE Brewing System with ThermoFresh® Servers

- Brews 6.2 to 11.4 gallons (23.5 to 43.2 litres) of perfect coffee per hour.
- Brews 1/2, 1 or 1 1/2 gallon (1.9, 3.8 or 5.7 litre) batches.
- Stores individual coffee recipes so operator can easily brew many varieties.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Operate any combination of BrewWISE equipment error-free with wireless brewer-grinder interface through Smart Funnel with SplashGuard®
- Energy saver mode reduces tank temperature during idle periods.
- Black and stainless models available.
- ThermoFresh servers are vacuum insulated to keep coffee hot for hours.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the Recipe Writer using your PC (Windows compatible).



Stainless steel finish available.

For current specification sheets and other information, go to www.bunn.com.

* International models may vary in appearance.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004



Easy Clear® EQHP-10L
Product No. : 39000.0001

Single/Dual Filter Pack
Product No. : 20138.0000
Packed per case: 500
Dimensions:



5 1/4" Base x 4 1/4" Sidewall
13.3 cm Base x 10.8 cm Sidewall

G9-2T DBC
Product No.: 33700.0000



BrewWISE® Recipe Writer (BRW)
Product No.: 34444.0000 (120V)
Dimensions:
2 3/16" H x 6 3/8" W x 9 1/2" D
5.56 cm H x 16.2 cm W x 24.1 cm D




Recipe Card
Product No.: 34447.0000

- Program a recipe to be used on brewer or grinder.



Ad Card
Product No.: 34448.0000

- Program a message to appear on the brewer's display.



1 gallon TF Server
Product No.:44000.0000
Product No.:44000.0001
(black)



1.5 gallon TF Server
Product No.:44050.0000
Product No.:44050.0001
(black)



1 gallon Digital TF Server
Product No.:42700.0000
Product No.:42700.0001
(black)



1.5 gallon Digital TF Server
Product No.:42750.0000
Product No.:42750.0001
(black)



Model

Single TF DBC

Agency Listing



Dimensions & Specifications

| Model | Product # | Volts | Amps | Tank Heater Watts | Total Watts | Brewing Capacity | Cu. Ft. | Shipping Weight | Funnel Locks | Cord Attached |
|----------------|------------|---------|------|-------------------|-------------|------------------|---------|-----------------|--------------|---------------|
| Single TF DBC | 34800.0000 | 120/240 | 16.6 | 4000 | 4000 | 11.4 gal/hr | 4.4 | 59 lbs. | Yes | No |
| Single TF DBC* | 34800.0001 | 120/240 | 16.6 | 4000 | 4000 | 11.4 gal/hr | 4.4 | 59 lbs. | Yes | No |
| Single TF DBC | 34800.0002 | 120/208 | 19.2 | 4000 | 4000 | 11.4 gal/hr | 4.4 | 59 lbs. | No | No |
| Single TF DBC | 34800.0003 | 120/208 | 19.2 | 4000 | 4000 | 11.4 gal/hr | 4.4 | 59 lbs. | Yes | No |
| Single TF DBC* | 34800.0004 | 120/240 | 16.6 | 4000 | 4000 | 11.4 gal/hr | 4.4 | 59 lbs. | No | No |
| Single TF DBC* | 34800.0008 | 120 | 18.1 | 2200 | 2200 | 6.2 gal/hr | 4.4 | 59 lbs. | Yes | Yes** |
| Single TF DBC | 34800.0017 | 120 | 18.1 | 2200 | 2200 | 6.2 gal/hr | 4.4 | 59 lbs. | Yes | Yes** |
| G9-2T DBC | 33700.0000 | 120 | 9.4 | n/a | 1080 | n/a | 5.9 | 67 lbs. | n/a | Yes |
| G9-2T DBC* | 33700.0001 | 120 | 9.4 | n/a | 1080 | n/a | 5.9 | 67 lbs. | n/a | Yes |
| TF Server | 42750.0000 | n/a | n/a | n/a | n/a | 1.5 gallons | 2.8 | 16 lbs. | n/a | No |
| TF Server* | 42750.0001 | n/a | n/a | n/a | n/a | 1.5 gallons | 2.8 | 16 lbs. | n/a | No |

* Models have black finish. **Power cord (NEMA 5-20P) 20 amp - 120 volt


Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Brewer is 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.

Grinder is 2-wires plus ground service rated 120V, 60Hz, circuit required, ¾ HP motor.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with ⅜" male fitting.

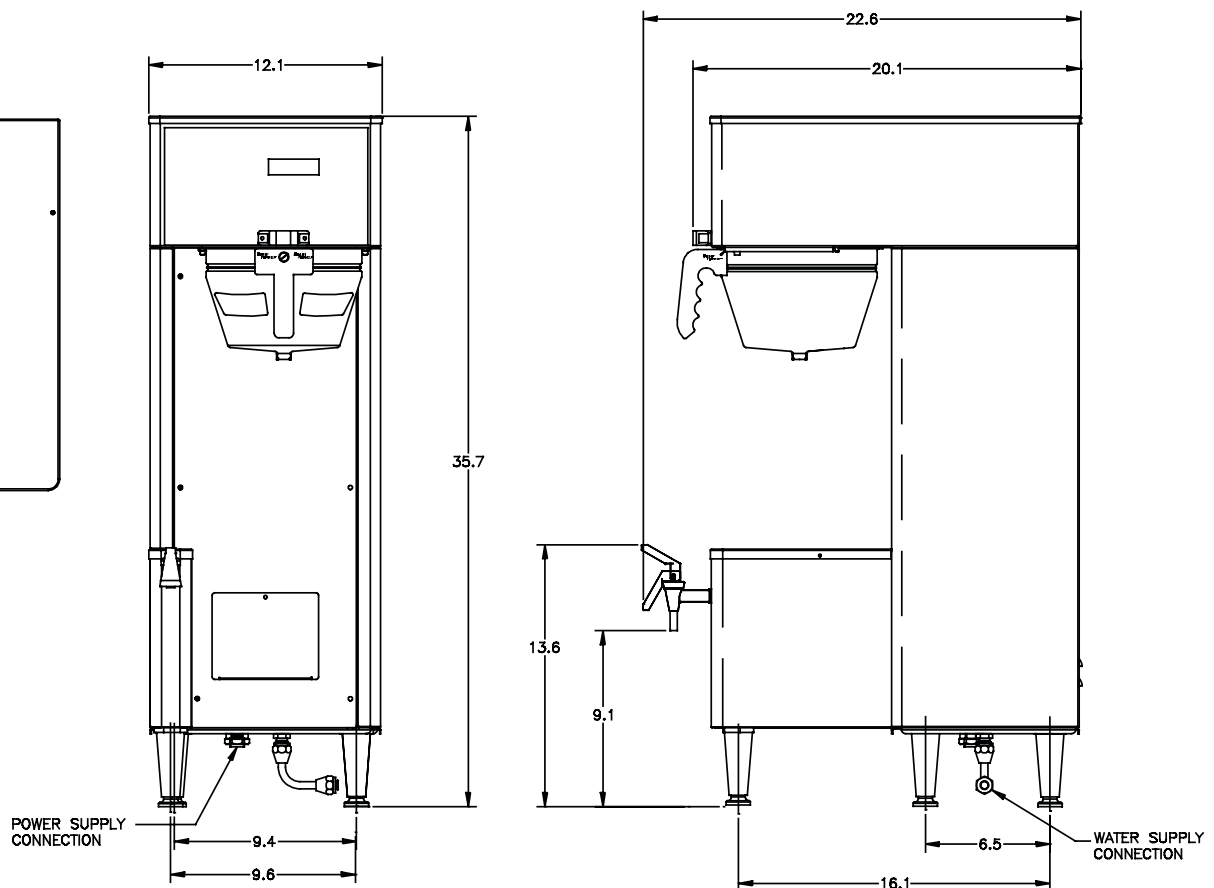

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.