

1. Commercial Series Refrigerators and Freezers
2. Walk-In Coolers
3. Cooler and Freezer Shelving

Hoshizaki

Hoshizaki refrigerators and freezers are produced in one of the industry's most automated production plants, utilizing the latest state-of-the-art technology. Every refrigerator and freezer is run-tested at the factory prior to shipment.

Commercial Series

- Stainless steel interior and exterior front, top and sides for long life, durability and easy maintenance
- Self contained refrigeration system with energy efficient thermostatic expansion valve in upright models
- Rapid temperature cool down and recovery time
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- One piece, full length, extruded aluminum, flush mount door handle maximizes aisle space
- Solid state, digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Unique "ducted" air distribution system, achieves a uniform cabinet temperature even when full
- Cabinets and doors are insulated with 2 3/8" foamed in place polyurethane
- Exclusive "stepped" door design to protect recessed door gasket
- Shelves are adjustable in 1" increments, allowing maximum interior flexibility
- Field reversible doors (with optional kit)
- Two and three section units are shipped with factory installed stem casters
- 79.63" high on casters, cabinet will go through standard door opening
- Enamel coated evaporator coil
- Automatic hot gas condensate disposable system, eliminates need for external drain
- Three year parts and labor warranty
- Five year parts warranty on compressor



Hoshizaki reach-in



Hoshizaki reach-in



Hoshizaki undercounter



Hoshizaki prep table



Hoshizaki worktop



U.S. Cooler walk-in

Commercial Series Reach-In Refrigerators and Freezers

Features

- Stainless steel interior, door liner, exterior front and sides
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- 4" heavy duty stem casters standard

section units). Voltage range: 104-126. Ambient temperature range: 45°-100°F. Refrigerator control set point range: +33°-+52°F. Refrigerant for refrigerators: R-134A. Refrigerant for freezers: R-404A. Freezer control set point range: -10°-+12°F. Left hand hinges available as special order. Options: door reversal kit, additional epoxy shelves, stainless steel shelves, combination universal tray/pan slides, foot pedal door opener, air filter.

All units are 33.75" deep, (59.5" deep with doors open at 90°), and 79.75" high including 4" casters. (See chart for widths.)
 Electrical: 115V/60/1, HACR breaker: 15 (HACR: 20.0 for 3



*Energy Star qualified.

| | Refrigerators | | | | | | Freezers | | | | | |
|--------------------------|----------------------|----------------------|----------------------|----------------------|--|--|----------------------|----------------------|----------------------|----------------------|----------------------------|----------------------------|
| | CR1S-FS* | CR1S-HS* | CR2S-FS* | CR2S-HS* | CR3S-FS | CR3S-HS | CF1S-FS | CF1S-HS | CF2S-FS* | CF2S-HS* | CF3S-FS | CF3S-HS |
| Nominal storage capacity | 22.8 ft ³ | 22.8 ft ³ | 50.5 ft ³ | 50.5 ft ³ | 73.3 ft ³ | 73.3 ft ³ | 22.8 ft ³ | 22.8 ft ³ | 50.5 ft ³ | 50.5 ft ³ | 73.3 ft ³ | 73.3 ft ³ |
| Int. storage cap. AHAM | 20.9 ft ³ | 20.8 ft ³ | 47.2 ft ³ | 47 ft ³ | 47.2 ft ³ 20.9 ft ³ | 47.0 ft ³ 20.8 ft ³ | 20.9 ft ³ | 20.8 ft ³ | 47.2 ft ³ | 47 ft ³ | 68.1 ft ³ | 67.8 ft ³ |
| Width | 27.5" | 27.5" | 55" | 55" | 83" | 83" | 27.5" | 27.5" | 55" | 55" | 83" | 83" |
| Depth, door open at 90° | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" |
| Interior door opening W | 22" | 22" | 22" | 22" | 22" | 22" | 22" | 22" | 22" | 22" | 22" | 22" |
| Interior door opening H | 59.25" | 27.75" | 59.25" | 27.75" | 59.25" | 27.75" | 59.25" | 27.75" | 59.25" | 27.75" | 59.25" | 27.75" |
| Adjustable shelves | 3 | 3 | 6 | 6 | 9 | 9 | 3 | 3 | 6 | 6 | 9 | 9 |
| Shelf size, W x D | 21.25 x 26" | 21.25 x 26" | 24 x 24.75" | 24 x 24.75" | 24 x 24.75" 21.25 x 26" | 24 x 24.75" 21.25 x 26" | 21.25 x 26" | 21.25 x 26" | 24 x 24.75" | 24 x 24.75" | 24 x 24.75" 21.25 x 26" | 24 x 24.75" 21.25 x 26" |
| Crated shipping weight | 354 lbs | 354 lbs | 540 lbs | 540 lbs | 895 lbs | 895 lbs | 360 lbs | 360 lbs | 545 lbs | 545 lbs | 905 lbs | 905 lbs |
| Crated W x D x H | 31.5 x 37.5 x 83" | | 58 x 36.5 x 83" | | 86 x 36.5 x 83" | | 31.5 x 37.5 x 83" | | 58 x 36.5 x 83" | | 86 x 36.5 x 83" | |
| Amperage | 4.0 | 4.0 | 5.8 | 5.8 | 12.0 | 12.0 | 9.0 | 9.0 | 11.0 | 11.0 | 9.5 | 9.5 |
| Energy (kwh/day) | 1.96 | 1.84 | 3.02 | 3.02 | 5.25 | 4.98 | 7.53 | 7.94 | 12.11 | 13.9 | 20.42 | 21.23 |
| Heat rejection (BTU/hr) | 401 | 392 | 660 | 660 | 595/367 | 595/367 | 1429 | 1704 | 2240 | 2244 | 2148/1589 | 2148/1589 |

Commercial Series Glass Door Refrigerators and Freezers

Features

- Stainless steel interior and exterior front and sides
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Refrigerator glass doors are energy efficient Multi Pane, Argon filled with locks
- Freezer glass doors are energy efficient Triple Pane, Argon filled with low-E non reflective coating and locks
- FGE models come with Energy efficient vertical LED lights
- 4" heavy duty stem casters standard

All units are 34.75" deep, (57.25" deep with doors open at 90°), and 79.75" high including 4" casters. (See chart for widths.)
 Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15 (HACR: 20.0 for 3 section units). Refrigerator ambient temperature range: 45°-100°F. Freezer ambient temperature range: 45°-80°F. Refrigerant for refrigerators: R-134A. Refrigerator control set point range: +31°-+52°F. Refrigerant for freezers: R-404A. Freezer control set point range: -10°-+12°F. Options: door reversal kit, additional epoxy shelves, stainless steel shelves, combination universal tray/pan slides, air filter.



CR1S-FGE
CF1S-FGE



CR2S-FGE
CF2S-FGE



CR3S-FGE

| | Refrigerators | | | Freezers | |
|--------------------------|----------------------|----------------------|--|----------------------|----------------------|
| | CR1S-FGE | CR2S-FGE | CR3S-FGE | CF1S-FGE | CF2S-FGE |
| Nominal storage capacity | 23.3 ft ³ | 50.5 ft ³ | 74.3 ft ³ | 23.3 ft ³ | 51.0 ft ³ |
| Int. storage cap. AHAM | 20.9 ft ³ | 47.2 ft ³ | 47.2 ft ³ 20.9 ft ³ | 20.9 ft ³ | 47.2 ft ³ |
| Width | 27.5" | 55" | 83" | 27.5" | 55" |
| Depth, door open at 90° | 57.25" | 57.25" | 57.25" | 57.25" | 57.25" |
| Interior door opening W | 22" | 22" | 22" | 22" | 22" |
| Interior door opening H | 59.5" | 59.5" | 59.5" | 59.5" | 59.5" |
| Adjustable shelves | (3) 21.25 x 26" | (6) 24 x 24.75" | (6) 24 x 24.75" (3) 21.25 x 26" | (3) 21.25 x 26" | (6) 24 x 24.75" |
| Crated shipping weight | 354 lbs | 540 lbs | 895 lbs | 360 lbs | 545 lbs |
| Crated W x D x H | 31.5 x 37.5 x 83" | 58 x 36.5 x 83" | 86 x 37.5 x 83" | 31.5 x 37.5 x 83" | 58 x 37.5 x 83" |
| Amperage | 4.0 | 7.0 | 12.0 | 9.0 | 11.0 |
| Energy (kwh/day) | 2.56 | 4.85 | 4.85 (L) / 2.56 (R) | 8.53 | 14.21 |
| Heat rejection (BTU/hr) | 570 | 928 | 928 (L) / 570 (R) | 1458 | 2122.5 |

Commercial Series Undercounter Refrigerators and Freezers

Features

- Stainless steel interior and exterior front, sides and top (ABS interior liner for HR24A)
- Stainless steel exterior door with ABS interior liner (aluminum interior door liner for HR24A)
- Cabinet and doors have 2" R-134A CFC free foam insulation
- Engineered to maintain NSF-7 standards in 100°F ambient temperatures. Certified under NSF-7 in 86°F
- Field reversible doors
- Electronic controls
- 4" heavy duty stem casters, 2.25" casters on LP models meet ADA requirements (HR24A has legs)
- Cylinder door lock on part numbers ending in -01

Electrical: 115V/60/1, voltage range: 104-127, HACR breaker: 15. Ambient temperature range: 45°-100°F (60°-95°F for HR24A). Refrigerator control set point range: 32°-52°F (36°-50°F for HR24A). Refrigerant: R-134a. Freezer control set point range: -10°-+10°F.

Factory installed cylinder door lock is available as special order (add -01 to the end of the part number). Options: additional epoxy shelves, 2.25" casters to meet ADA, and 6" casters.



Compact HR24A
 UL approved for outdoor use

CRMR27 CRMR36
 CRMR27-LP CRMR36-01
 CRMR27-01
 CRMF27
 CRMF27-LP
 CRMF27-01

CRMR48 CRMR60
 CRMR48-01 CRMR60-01
 CRMF48 CRMF60
 CRMF48-01 CRMF60-01

CRMR72
 CRMR72-01

*Energy Star qualified

HR24A UL approved for outdoor use.
 CRMR27-LP and CRMF27-LP low profile units meet ADA requirements, height 32.25".

| | Door Refrigerators | | | | | | Door Freezers | | | |
|----------------------------|--------------------------------|---------------------|---------------------|-----------------------|-----------------------|-----------------------|---------------------|----------------------|-----------------------|-----------------------|
| | HR24A* | CRMR27* | CRMR36* | CRMR48 | CRMR60 | CRMR72* | CRMF27* | CRMF27-LP* | CRMF48* | CRMF60* |
| Nominal storage capacity | | 7.2 ft ³ | 9.9 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ | 7.2 ft ³ | 7.2 ft ³ | 13.66 ft ³ | 17.55 ft ³ |
| Int. storage cap. AHAM | 4.0 ft ³ | 6.2 ft ³ | 8.7 ft ³ | 11.95 ft ³ | 16.6 ft ³ | 19.7 ft ³ | 6.2 ft ³ | 6.22 ft ³ | 11.95 ft ³ | 16.6 ft ³ |
| Width | 23.4" | 27" | 36" | 48" | 60" | 72" | 27" | 27" | 48" | 60" |
| Depth | 24.5" | 30" | 30" | 30" | 30" | 30" | 30" | 30" | 30" | 30" |
| Depth, door open at 90° | 51.5" | 54.5" | 56.5" | 51.5" | 57.5" | 51.5" | 54.5" | 54.5" | 54.5" | 57.5" |
| Height (with legs/casters) | 32.7" | 33.63" | 33.63" | 33.63" | 33.63" | 33.63" | 33.63" | 32.3" | 33.63" | 33.63" |
| Interior door opening W | 18.1" | 22.6" | 25.5" | 19.5" | 25.5" | 19.5" | 22.6" | 22.6" | 19.5" | 25.5" |
| Interior door opening H | | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" |
| Adjustable shelves, W x D | (1) 19" x 17" (2) 19" x 12" | (1) 22.8" x 16" | (1) 31" x 16" | (2) 21.3" x 16" | (2) 27.25" x 16" | (3) 22" x 16" | (1) 22" x 16" | (1) 22" x 16" | (2) 21.3" x 16" | (2) 27.25" x 16" |
| Crated shipping weight | 102 lbs | 156 lbs | 187 lbs | 222 lbs | 268 lbs | 312 lbs | 156 lbs | 156 lbs | 237 lbs | 268 lbs |
| Crated W x D x H | 24 x 26 x 38" | 31.5x34x36.5 | 40.5x34x36.5 | 52.5x34x36.5 | 62x34x36.5 | 74x34x36.5 | 31.5x34x36.5 | 31.5x34x36.5 | 52.5x34x36.5 | 62x34x36.5 |
| Amperage | 2.0 | 2.6 | 2.9 | 2.6 | 4.2 | 4.2 | 2.66 | 3.4 | 6.0 | 6.0 |
| Energy (kwh/day) | 0.378 | .65 | .81 | 1.44 | 2.15 | 2.84 | 3.1 | 2.66 | 4.34 | 4.86 |
| Heat rejection (BTU/hr) | N/A | 180 | 242.3 | 327 | 414 | 539 | 442 | 442 | 820 | 821 |

Commercial Series Undercounter and Worktop Refrigerators and Freezers with Drawers

Features

- Stainless steel interior and exterior front, sides and top
- Stainless steel exterior drawers with stainless steel interior liner
- Cabinet and drawers have 2" CFC free foam insulation
- Engineered to maintain NSF-7 standards in 100°F ambient temperatures. Certified under NSF-7 in 86°F
- 4" heavy duty stem casters standard for undercounter
- 6" heavy duty stem casters standard for worktops
- Electronic controls

Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15. Ambient temperature range: 45°-100°F. Refrigerator control set point range: 32°-52°F. Refrigerant: R-134a. Freezer control set point range: -10°-+10°F.

Options: 2.25" casters to meet ADA, different size casters, 6" legs, stainless steel back.

Worktop refrigerator and freezer part numbers end in -WD, height is 6.37" greater and weight is slightly more than undercounter models.



CRMR27-D
CRMF27-D



CRMR48-D4 CRMR60-D4
CRMF48-D4



CRMR72-D6



CRMR27-WD
CRMF27-WD



CRMR48-WD4 CRMR60-WD4
CRMF48-WD4



CRMR72-WD6

| | Drawer Refrigerators | | | | Drawer Freezers | |
|--------------------------|------------------------|-------------------------|-------------------------|-------------------------|------------------------|-------------------------|
| | CRMR27-D CRMR27-WD | CRMR48-D4 CRMR48-WD4 | CRMR60-D4 CRMR60-WD4 | CRMR72-D6 CRMR72-WD6 | CRMF27-D CRMF27-WD | CRMF48-D4 CRMF48-WD4 |
| Nominal storage capacity | 7.2 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ | 7.2 ft ³ | 13.66 ft ³ |
| Int. storage cap. AHAM | 6.2 ft ³ | 11.95 ft ³ | 16.6 ft ³ | 19.7 ft ³ | 6.2 ft ³ | 11.95 ft ³ |
| Width | 27" | 48" | 60" | 72" | 27" | 48" |
| Depth | 30" | 30" | 30" | 30" | 30" | 30" |
| Depth, drawer open | 49.25" | 49.25" | 49.25" | 49.25" | 49.25" | 49.25" |
| Height (with casters) | 33.63/40" | 33.63/40" | 33.63/40" | 33.63/40" | 33.63/40" | 33.63/40" |
| Drawer opening W | 22.6" | 19.5" | 25.5" | 19.5" | 22.6" | 19.5" |
| Drawer opening H | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" |
| Drawer pan capacity* | (1) 12 x 20 x 6" deep | (1) 1/2 & 1/3 6" deep | (1) 12 x 20 x 6" deep | (1) 1/2 & 1/3 6" deep | (1) 12 x 20 x 6" deep | (1) 1/2 & 1/3 6" deep |
| Crated shipping weight | 176 lbs | 262/263 lbs | 308/312 lbs | 372/377 lbs | 176 lbs | 262/263 lbs |
| Crated W x D x H | 31.5 x 34 x 36.5/40.5" | 52.5 x 34 x 36.5/40.5" | 62 x 34 x 36.5/40.5" | 74 x 34 x 36.5/40.5" | 31.5 x 34 x 36.5/40.5" | 52.5 x 34 x 36.5/40.5" |
| Amperage | 2.6 | 2.6 | 4.2 | 4.2 | 3.4 | 6 |
| Energy (kwh/day) | 1.4 | 2.3 | 2.15 | 4.5 | 3.9 | 6.6 |
| Heat rejection (BTU/hr) | 202.8 | 327 | 473.5 | 647 | 560 | 945 |

*Drawer pans by others

Commercial Series Worktop Refrigerators and Freezers

Features

- Stainless steel interior and exterior front, sides and top
- Stainless steel exterior drawers with stainless steel interior liner
- Cabinet and doors have 2" CFC free foam insulation
- Engineered to maintain NSF-7 standards in 100°F ambient temperatures. Certified under NSF-7 in 86°F
- 6" heavy duty stem casters standard
- Field reversible doors
- Electronic controls

Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15. Ambient temperature range: 45°-100°F. Refrigerator control set point range: 32°-52°F. Refrigerant: R-134a. Freezer control set point range: -10°-+10°F.

Factory installed cylinder door lock is available as special order (add -01 to the end of the part number). Options: additional epoxy shelves, 2.25" casters to meet ADA, and 4" casters.



CRMR27-W CRMR36-W
 CRMR27-W01 CRMR36-W01
 CRMF27-W
 CRMF27-W01

CRMR48-W CRMR60-W
 CRMR48-W01 CRMR60-W01
 CRMF48-W CRMF60-W
 CRMF48-W01 CRMF60-W01

CRMR72-W

*Energy Star qualified.

| | Door Refrigerators | | | | | Door Freezers | | |
|---------------------------|---------------------|---------------------|-----------------------|-----------------------|-----------------------|---------------------|-----------------------|-----------------------|
| | CRMR27-W* | CRMR36-W* | CRMR48-W | CRMR60-W | CRMR72-W* | CRMF27-W | CRMF48-W | CRMF60-W |
| Nominal storage capacity | 7.2 ft ³ | 9.9 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ | 7.2 ft ³ | 13.66 ft ³ | 17.55 ft ³ |
| Int. storage cap. AHAM | 6.2 ft ³ | 8.7 ft ³ | 11.95 ft ³ | 16.6 ft ³ | 19.7 ft ³ | 6.2 ft ³ | 11.95 ft ³ | 16.6 ft ³ |
| Width | 27" | 36" | 48" | 60" | 72" | 27" | 48" | 60" |
| Depth | 30" | 30" | 30" | 30" | 30" | 30" | 30" | 30" |
| Depth, door open at 90° | 54.5" | 56.5" | 51.5" | 57.5" | 51.5" | 54.5" | 51.5" | 57.5" |
| Height (with casters) | 40" | 40" | 40" | 40" | 40" | 40" | 40" | 40" |
| Interior door opening W | 22.6" | 25.5" | 19.5" | 25.5" | 19.5" | 22.6" | 19.5" | 25.5" |
| Interior door opening H | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" |
| Adjustable shelves, W x D | (1) 22.8" x 16" | (1) 31" x 16" | (2) 21.3" x 16" | (2) 27.25" x 16" | (3) 22" x 16" | (1) 22.8" x 16" | (2) 21.3" x 16" | (2) 27.25" x 16" |
| Crated shipping weight | 156 lbs | 187 lbs | 223 lbs | 272 lbs | 312 lbs | 156 lbs | 238 lbs | 272 lbs |
| Crated W x D x H | 31.5 x 34 x 40.5" | 40.5 x 34 x 40.5" | 52.5 x 34 x 40.5" | 62 x 34 x 40.5" | 74 x 34 x 40.5" | 31.5 x 34 x 40.5" | 52.5 x 34 x 40.5" | 62 x 34 x 40.5" |
| Amperage | 2.6 | 2.9 | 2.6 | 4.2 | 4.2 | 3.4 | 6.0 | 6.0 |
| Energy (kwh/day) | .65 | .81 | 1.44 | 2.15 | 2.84 | 2.66 | 4.34 | 4.86 |
| Heat rejection (BTU/hr) | 180 | 242.3 | 327 | 414 | 539 | 442 | 820 | 821 |

Commercial Series Sandwich Top and Mega Top Refrigerators (continued on next page)

Exclusive design distributes cold air through a system of ducts and louvers positioned throughout the cabinet. Constant air movement circulates top to bottom... surrounding the food with perfect, uniform temperatures.

Sandwich Tops have two rows of 4" deep 1/6 size pans, a smaller hood, and the 10" deep white polyethylene cutting board mounts flush with the front of the refrigerator.

Mega Tops have three rows of 4" deep 1/6 size pans, a larger hood, and the 8" deep white polyethylene cutting board extends approximately 4.6" beyond the front of the refrigerator.

The pan capacity, hood size, and depth (due to position and size of the cutting board) are the only differences between the Sandwich Top and Mega Top refrigerators. All other specifications are the same.

Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15. Ambient temperature range: 45°-100°F. Refrigerator control set point range: 32°-52°F. Refrigerant: R-134a.

Features

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors have 2" CFC free foam insulation
- Engineered to maintain NSF-7 standards in 100°F ambient temperatures. Certified under NSF-7 in 86°F
- 6" heavy duty stem casters standard
- Field reversible doors
- Electronic controls
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" cutting board standard



| | Door Refrigerators | | | | | | |
|---------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Sandwich Top | CRMR27-8 | CRMR36-10 | CRMR48-8 | CRMR48-12 | CRMR60-8 | CRMR60-12 | CRMR60-16 |
| Pan capacity (# and size) | (8) 1/6 x 4"D | (10) 1/6 x 4"D | (8) 1/6 x 4"D | (12) 1/6 x 4"D | (8) 1/6 x 4"D | (12) 1/6 x 4"D | (16) 1/6 x 4"D |
| Sandwich Top depth | 30.7" | 30.7" | 30.7" | 30.7" | 30.7" | 30.7" | 30.7" |
| Mega Top | CRMR27-12M | CRMR36-15M | CRMR48-12M | CRMR48-18M | CRMR60-12M | CRMR60-18M | CRMR60-24M |
| Pan capacity (# and size) | (12) 1/6 x 4"D | (15) 1/6 x 4"D | (12) 1/6 x 4"D | (18) 1/6 x 4"D | (12) 1/6 x 4"D | (18) 1/6 x 4"D | (24) 1/6 x 4"D |
| Mega Top depth | 37.3" | 37.3" | 37.3" | 37.3" | 37.3" | 37.3" | 37.3" |
| Nominal storage capacity | 7.21 ft³ | 9.9 ft³ | 13.66 ft³ | 13.66 ft³ | 17.55 ft³ | 17.55 ft³ | 17.55 ft³ |
| Int. storage cap. AHAM | 4.38 ft³ | 8.7 ft³ | 11.95 ft³ | 11.95 ft³ | 16.6 ft³ | 16.6 ft³ | 16.6 ft³ |
| Width | 27" | 36" | 48" | 48" | 60" | 60" | 60" |
| Depth, door open at 90° | 54.5" | 56.5" | 51.5" | 51.5" | 57.5" | 57.5" | 57.5" |
| Height (with casters) | 45.25" | 45.25" | 45.25" | 45.25" | 45.25" | 45.25" | 45.25" |
| Interior door opening W | 22.6" | 25.5" | 19.5" | 19.5" | 25.5" | 25.5" | 25.5" |
| Interior door opening H | 22.9" | 22.9" | 22.9" | 22.9" | 23" | 23" | 23" |
| Adjustable shelves, W x D | (1) 21.3/22" x 16" | (1) 31" x 16" | (2) 21.3" x 16" | (2) 21.3" x 16" | (2) 22/27.5" x 16" | (2) 22/27.5" x 16" | (2) 22/27.5" x 16" |
| Crated shipping weight | 185 lbs | 225 lbs | 222 lbs | 222 lbs | 323 lbs | 323 lbs | 323 lbs |
| Crated W x D x H | 31.5 x 34 x 45.75" | 40.5 x 34 x 45.75" | 52.5 x 34 x 45.75" | 52.5 x 34 x 45.75" | 64.5 x 34 x 45.75" | 64.5 x 34 x 45.75" | 64.5 x 34 x 45.75" |
| Amperage | 2.6 | 2.4 | 2.6 | 2.6 | 5.5/6.0 | 5.5/6.0 | 5.5/6.0 |
| Energy (kwh/day) | 3.8 | 3.4 | 4.0 | 4.0 | 4.2 | 4.2 | 4.2 |
| Heat rejection (BTU/hr) | 540 | 479.2 | 567 | 567 | 596.5/597.5 | 596.5/597.5 | 596.5/597.5 |

Commercial Series Sandwich Top and Mega Top Refrigerators (continued from previous page)

Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15. Ambient temperature range: 45°-100°F. Refrigerator control set point range: 32°-52°F. Refrigerant: R-134a.

Options: additional epoxy shelves, 2" casters, 4" casters, 6" legs, flat lift off stainless steel cover, stainless steel back, and large pan adapter bars.



| | Door Refrigerators | | | Drawer Refrigerators | | | |
|---------------------------|-----------------------|-----------------------|-----------------------|-----------------------------|-----------------------------------|-----------------------------|-----------------------------------|
| Sandwich Top | CRMR72-12 | CRMR72-16 | CRMR72-18 | CRMR27-8D | CRMR48-12D4 | | |
| Pan capacity (# and size) | (12) 1/6 x 4"D | (16) 1/6 x 4"D | (18) 1/6 x 4"D | (8) 1/6 x 6"D | (12) 1/6 x 6"D | | |
| Sandwich Top depth | 30.7" | 30.7" | 30.7" | 30.7" | 30.7" | | |
| Mega Top | CRMR72-18M | CRMR72-24M | CRMR72-30M | CRMR27-12MD | CRMR48-18MD4 | CRMR60-24MD4 | CRMR72-30MD6 |
| Pan capacity (# and size) | (18) 1/6 x 4"D | (24) 1/6 x 4"D | (30) 1/6 x 4"D | (12) 1/6 x 6"D | (18) 1/6 x 6"D | (24) 1/6 x 6"D | (30) 1/6 x 6"D |
| Mega Top depth | 37.3" | 37.3" | 37.3" | 37.3" | 37.3" | 37.3" | 37.3" |
| Nominal storage capacity | 21.25 ft ³ | 21.25 ft ³ | 21.25 ft ³ | 7.2 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 21.25 ft ³ |
| Int. storage cap. AHAM | 19.7 ft ³ | 19.7 ft ³ | 19.7 ft ³ | 4.38 ft ³ | 11.95 ft ³ | 16.6 ft ³ | 19.7 ft ³ |
| Width | 72" | 72" | 72" | 27" | 48" | 60" | 72" |
| Depth, door/drawer open | 51.5" | 51.5" | 51.5" | 49.25" | 49.25" | 49.25" | 49.25" |
| Height (with casters) | 45.25" | 45.25" | 45.25" | 45.25" | 45.25" | 45.25" | 45.25" |
| Door/drawer opening W | 19.5" | 19.5" | 19.5" | 22.6/19.5" | 19.5" | 25.5" | 19.5" |
| Door/drawer opening H | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" | 22.9" |
| Shelf size, W x D | (3) 22" x 16" | (3) 22" x 16" | (3) 22" x 16" | (1) 12 x 20 x 6" pan/drawer | (1) 1/2 & (1) 1/3 x 6" pan/drawer | (1) 12 x 20 x 6" pan/drawer | (1) 1/2 & (1) 1/3 x 6" pan/drawer |
| Crated shipping weight | 375 lbs | 375 lbs | 375 lbs | 205 lbs | 262 lbs | 343 lbs | 435 lbs |
| Crated W x D x H | 74 x 34 x 45.75" | 74 x 34 x 45.75" | 74 x 34 x 45.75" | 31.5 x 34 x 45.75" | 52.5 x 34 x 45.75" | 64.5 x 34 x 45.75" | 74 x 34 x 45.75" |
| Amperage | 6.41/6.0 | 6.41/6.0 | 6.41/6.0 | 2.6 | 2.6 | 6.0 | 6.0 |
| Energy (kwh/day) | 4.2/6.5 | 4.2/6.5 | 4.2/6.5 | 1.6 | 4.0 | 3.9 | 5.1 |
| Heat rejection (BTU/hr) | 911/929.3 | 911/929.3 | 911/929.3 | 230 | 567 | 556 | 726 |

Commercial Series Pizza Prep Refrigerators



CPT46



CPT46-D



CPT67



CPT93



CPT93-D6

Features

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and doors have 2" CFC free foam insulation
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Adjustable ducted air distribution for rail/cabinet
- 19" x 1/2" thick white polyethylene cutting board
- Engineered to maintain NSF-7 standards in 100°F ambient temperatures. Certified under NSF-7 in 86°F
- Field reversible doors
- 6" heavy duty casters, two with brakes

Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15. Ambient temperature range: 45°-100°F. Refrigerator control set point range: 14°-45°F. Refrigerant: R-134a.



| | Door Refrigerators | | | Drawer Refrigerators | | |
|--------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| | CPT46 | CPT67 | CPT93 | CPT46-D | CPT67-D4 | CPT93-D6 |
| Nominal storage capacity | 11.0 ft ³ | 19.9 ft ³ | 30.1 ft ³ | 11.0 ft ³ | 19.9 ft ³ | 30.1 ft ³ |
| Width | 46" | 67" | 93" | 46" | 67" | 93" |
| Depth with cutting board installed | 35" | 35" | 35" | 35" | 35" | 35" |
| Depth, door/drawer open | 59.5" | 56.75" | 56.75" | 56.5" | 56.5" | 56.5" |
| Height (with casters) | 43.5" | 43.5" | 43.5" | 43.5" | 43.5" | 43.5" |
| Interior door/drawer opening W | 22.5" | 22.5" | 22.5" | 22.5" | 22.5" | 22.5" |
| Interior door/drawer opening H | 23" | 23" | 23" | 23" | 23" | 23" |
| Shelf size, W x D | (2) 22 x 16" | (4) 24.75 x 25.5" | (6) 24.75" x 25.5" | N/A | N/A | N/A |
| Pan capacity (# and size) | (6) 1/3 x 6"D | (9) 1/3 x 6"D | (12) 1/3 x 6"D | (6) 1/3 x 6"D | (9) 1/3 x 6"D | (12) 1/3 x 6"D |
| Drawer pan capacity (pans by others) | | | | (2) 12 x 20 x 6"D | (2) 12 x 20 x 6"D | (2) 12 x 20 x 6"D |
| Crated shipping weight | 284 lbs | 420 lbs | 509 lbs | 337 lbs | 512 lbs | 625 lbs |
| Crated W x D x H | 48 x 34 x 44" | 69 x 34 x 44" | 95 x 34 x 44" | 48 x 33.75 x 44.25 | 69 x 33.75 x 44.25 | 95 x 33.75 x 44.25 |
| Amperage | 3.7 | 5.5 | 5.5 | 3.7 | 5.5 | 5.5 |
| Energy (kwh/day) | 3.2 | 5.0 | 5.5 | 4.3 | 6.0 | 5.7 |
| Heat rejection (BTU/hr) | 454 | 706 | 775.3 | 605 | 848 | 803.5 |

Commercial Series Drawer/Door Combination Refrigerators

Features

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors have 2" CFC free foam insulation
- Engineered to maintain NSF-7 standards in 100°F ambient temperatures. Certified under NSF-7 in 86°F
- Drawer/door configuration can be located in any cabinet section
- Field reversible doors
- Enamel coated evaporation coil

Sandwich Tops have two rows of 4" deep 1/6 size pans, a hood, and a 10" deep white polyethylene cutting board that mounts flush with the front of the refrigerator.

Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15. Ambient temperature range: 45°-100°F. Refrigerator control set point range: 32°-52°F. Refrigerant: R-134a.

Made to order: allow 4-6 week lead time



CRMR48-D2



CRMR60-D2



CRMR48-WD2



CRMR60-WD2



CRMR48-12D2

| | Undercounter | | Worktop | | Sandwich Top |
|------------------------------------|------------------------------|-----------------------|------------------------------|---------------------------|------------------------------|
| | CRMR48-D2 | CRMR60-D2 | CRMR48-WD2 | CRMR60-WD2 | CRMR48-12D2 |
| Nominal storage capacity | 13.66 ft ³ | 17.55 ft ³ | 13.66 ft ³ | 17.55 ft ³ | 13.66 ft ³ |
| Int. storage cap. AHAM | 11.95 ft ³ | 16.6 ft ³ | 11.95 ft ³ | 16.6 ft ³ | 11.95 ft ³ |
| Width | 48" | 60" | 48" | 60" | 48" |
| Depth with cutting board installed | N/A | N/A | N/A | N/A | 30.7" |
| Depth, door open at 90° | 51.5" | 57.5" | 51.5" | 57.5" | 51.5" |
| Depth, drawer open | 49.25" | 49.25" | 49.25" | 49.25" | 49.25" |
| Height (with casters) | 33.6" | 33.6" | 40" | 40" | 45.25" |
| Door opening W | 19.5" | 25.5" | 19.5" | 25.5" | 19.5" |
| Door opening H | 23" | 23" | 23" | 23" | 23" |
| Adjustable shelf, W x D | (1) 21.25" x 16" | (1) 27.25" x 16" | (1) 21.25" x 16" | (1) 27.25" x 16" | (1) 21.25" x 16" |
| Pan capacity per drawer | (1) 1/2 & (1) 1/3 size x 6"D | (1) full size pan 6"D | (1) 1/2 & (1) 1/3 size x 6"D | (1) full size pan 6" deep | (1) 1/2 & (1) 1/3 size x 6"D |
| Crated shipping weight | 241 lbs | 288 lbs | 242 lbs | 292 lbs | 242 lbs |
| Crated W x D x H | 52.5 x 34 x 36.5" | 62 x 34 x 36.5" | 52.5 x 34 x 40.5" | 62 x 34 x 40.5" | 52.5 x 34 x 45.75" |
| Amperage | 2.6 | 4.2 | 2.6 | 4.2 | 2.6 |
| Energy (kwh/day) | 2.3 | 3.3 | 2.3 | 3.3 | 4.0 |
| Heat rejection (BTU/hr) | 327 | 473.5 | 327 | 473.5 | 567 |

Commercial Series Drawer/Door Combination Refrigerators

Features

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors have 2" CFC free foam insulation
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 standards in 100°F ambient temperatures. Certified under NSF-7 in 86°F
- Drawer/door configuration can be located in any cabinet section
- Field reversible doors

Mega Tops have three rows of 4" deep 1/6 size pans, a hood, and the 8" deep white polyethylene cutting board extends approximately 4.6" beyond the front of the refrigerator.

Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15. Ambient temperature range: 45°-100°F. Refrigerator control set point range: 32°-52°F. Refrigerant: R-134a.

Made to order: allow 4-6 week lead time



CPT67-D2



CRMR48-18MD2



CRMR60-24MD2



CPT93-D2



CPT93-D4



CRMR72-30MD2



CRMR72-30MD4

| | Prep Refrigerators | | | Mega Top Refrigerators | | | |
|--------------------------------------|----------------------|--------------------|--------------------|---------------------------------------|--------------------------------|---------------------------------------|---------------------------------------|
| | CPT67-D2 | CPT93-D2 | CPT93-D4 | CRMR48-18MD2 | CRMR60-24MD2 | CRMR72-30MD2 | CRMR72-30MD4 |
| Nominal storage capacity | | | | 13.66 ft ³ | 17.6 ft ³ | 21.2 ft ³ | 21.2 ft ³ |
| Int. storage cap. AHAM | 19.9 ft ³ | 30 ft ³ | 30 ft ³ | 11.95 ft ³ | 16.6 ft ³ | 19.7 ft ³ | 19.7 ft ³ |
| Width | 67" | 93" | 93" | 48" | 60" | 72" | 72" |
| Depth | 32.25" | 32.25" | 32.25" | 30" | 30" | 30" | 30" |
| Depth with cutting board installed | 35" | 35" | 35" | 37.3" | 37.3" | 37.3" | 37.3" |
| Depth, door open at 90° | 56.75" | 56.75" | 56.75" | 51.5" | 57.5" | 51.5" | 51.5" |
| Depth, drawer open | 56.5" | 56.5" | 56.5" | 49.25" | 49.25" | 49.25" | 49.25" |
| Height (with 6" casters) | 43.5" | 43.5" | 43.5" | 45.25" | 45.25" | 45.25" | 45.25" |
| Door opening W | 22.5" | 22.5" | 22.5" | 19.5" | 25.5" | 19.5" | 19.5" |
| Door opening H | 23" | 23" | 23" | 23" | 23" | 23" | 23" |
| Adjustable shelf size, W x D | (2) 24.75 x 25.5" | (4) 24.75" x 25.5" | (2) 24.75" x 25.5" | (1) 21.25 x 16" | (1) 27.25 x 16" | (2) 22 x 16" | (1) 22 x 16" |
| Drawer pan capacity (# and size) | (6) 1/3 x 6"D | (6) 1/3 x 6"D | (12) 1/3 x 6"D | (18) 1/6 x 6"D | (24) 1/6 x 6"D | (30) 1/6 x 6"D | (30) 1/6 x 6"D |
| Drawer pan capacity (pans by others) | (2) 12 x 20 x 6"D | (2) 12 x 20 x 6"D | (4) 12 x 20 x 6"D | (1) 1/2 & (1) 1/3 size x 6"D / drawer | (1) full size pan 6"D / drawer | (1) 1/2 & (1) 1/3 size x 6"D / drawer | (1) 1/2 & (1) 1/3 size x 6"D / drawer |
| Crated shipping weight | 472 lbs | 547 lbs | 587 lbs | 242 lbs | 335 lbs | 396 lbs | 417 lbs |
| Crated W x D x H | 69 x 34 x 44" | 95 x 34 x 44" | 95 x 34 x 44" | 52.5 x 34 x 45.75" | 64.5 x 34 x 45.75" | 74 x 34 x 45.75" | 74 x 34 x 45.75" |
| Amperage | 5.5 | 5.5 | 5.5 | 2.6 | 6.0 | 6.0 | 6.0 |
| Energy (kwh/day) | 6.0 | 5.7 | 5.7 | 4.0 | 3.9 | 5.1 | 5.1 |
| Heat rejection (BTU/hr) | 848 | 803.5 | 803.5 | 567 | 556 | 725.5 | 725.5 |

Commercial Series Refrigerated Equipment Stands

Features

- Stainless steel exterior front, sides and top
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Top has an exclusive, built-in, ceramic heat shield
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celcius)

- Standard with (4-8) 4" casters, all with brakes
- Electronic controls

Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15. Ambient temperature range: 45°-100°F. Refrigerator control set point range: 28°-45°F. Refrigerant: R-134a.



CRES36



CRES49



CRES60



CRES72



CRES85




CRES98



CRES110

| | Equipment Stands | | | | | | |
|--------------------------------------|--------------------------------------|-------------------|---------------------|-------------------|--|--------------------|--------------------|
| | CRES36 | CRES49 | CRES60 | CRES72 | CRES85 | CRES98 | CRES110 |
| Width | 36.5" | 49" | 60.5" | 72.52" | 85" | 98" | 110.5" |
| Depth | 33.25" | 33.25" | 33.25" | 33.25" | 33.25" | 33.25" | 33.25" |
| Depth, drawer open | 54.25" | 54.25" | 54.25" | 54.25" | 54.25" | 54.25" | 54.25" |
| Height (with 4" casters) | 26" | 26" | 26" | 26" | 26" | 26" | 26" |
| Worktop max. load capacity | 700 lbs | 700 lbs | 700 lbs | 1200 lbs | 1200 lbs | 1500 lbs | 1500 lbs |
| Drawer pan capacity (pans by others) | (1) 12 x 20 x 6"D & (1) 1/2 x 6"D | (2) 12 x 20 x 6"D | (2) 12 x 20 x 6"D | (2) 12 x 20 x 6"D | L: (3) 12 x 20 x 6"D R: (2) 12 x 20 x 6"D | (3) 12 x 20 x 6"D | (3) 12 x 20 x 6"D |
| Pan capacity (12" x 20") | 2.5 | 2.5 | 2.5 | 8 | 10 | 12 | 12 |
| Crated shipping weight | 260 lbs | 327 lbs | 396 lbs | 450 lbs | 540 lbs | 646 lbs | 675 lbs |
| Crated W x D x H | 38 x 34.5 x 28.75 | 50 x 34.5 x 28.75 | 61.5 x 34.5 x 28.75 | 74 x 34.5 x 28.75 | 87 x 34.5 x 28.75 | 100 x 34.5 x 28.75 | 112 x 34.5 x 28.75 |
| Amperage | 3.7 | 3.7 | 3.7 | 4.3 | 4.3 | 4.3 | 4.3 |
| Energy (kwh/day) | 1.5 | 1.9 | 1.9 | 2.8 | 3.8 | 3.8 | 3.8 |
| Heat rejection (BTU/hr) | 220 | 275 | 275 | 398.1 | 538 | 535 | 535 |


Commercial Series Accessories




Caster with brake



Door foot pedals



Full shelf

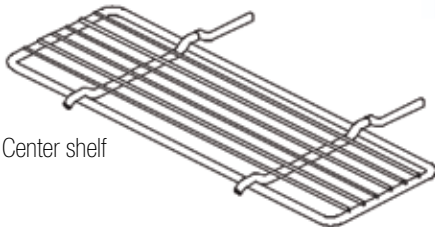

Center shelf


| Part Number | Description |
|---------------------------|--|
| CASTERS & LEGS | |
| HS-3546 | 4" Casters (set of four, two with brakes) 1/2 section uprights |
| HS-3547 | 4" Casters (set of six, three with brakes) 3 section uprights |
| HS-5035 | 4" Casters (set of four, two with brakes) 1, 2 & 3 section horizontal units |
| HS-5036 | 6" Casters (set of four, two with brakes) 1, 2 & 3 section horizontal units |
| HS-5037 | 2.25" Casters (set of four, two with brakes) ADA 1 & 2 section undercounters |
| HS-5066 | 6" Legs (set of four) undercounters |
| FOOT PEDALS | |
| HS-3721 | One door foot pedal, left hand hinge |
| HS-3722 | One door foot pedal, right hand hinge |
| HS-3723 | Two door foot pedal |
| FULL SHELVES | |
| HS-5052 | Industrial strength epoxy shelf, 1 section uprights |
| HS-5053 | Industrial strength epoxy shelf, 3 each, 1 section uprights |
| HS-5054 | Industrial strength SS shelf, 1 section uprights |
| HS-5047 | Industrial strength epoxy shelf, 2 section uprights |
| HS-5048 | Industrial strength epoxy shelf, 3 each, 2 section uprights |
| HS-5049 | Industrial strength SS shelf, 2 section uprights |
| HS-5058 | Epoxy shelf, all 27" and 72" undercounters, worktops and prep tables |
| HS-5059 | Epoxy shelf, all 48" undercounters, worktops and prep tables |
| HS-5108 | Epoxy shelf, all 60" undercounters, worktops and prep tables |
| HS-5116 | Stainless steel shelf, all 27" and 72" undercounters, worktops and prep tables |
| HS-5117 | Stainless steel shelf, all 48" undercounters, worktops and prep tables |
| HS-5118 | Stainless steel shelf, all 60" undercounters, worktops and prep tables |
| HS-5151 | Epoxy coated wire shelf for CPT67/93 |
| HS-5152 | Epoxy coated wire shelf for CPT46 |
| HS-5153 | Stainless steel shelf for CPT67/93 |
| HS-5154 | Stainless steel shelf for CPT46 |
| OVERSHELVES | |
| HS-5172 [†] | Single overshelf for 27" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5236 [†] | Single overshelf for 36" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5173 [†] | Single overshelf for 48" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5174 [†] | Single overshelf for 60" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5175 [†] | Single overshelf for 72" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5163 [†] | Double overshelf for 27" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5237 [†] | Double overshelf for 36" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5164 [†] | Double overshelf for 48" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5165 [†] | Double overshelf for 60" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5166 [†] | Double overshelf for 72" cabinet, undercounters, worktops, sandwich & mega tops |
| HS-5229 ^{*‡} | Single overshelf for 46"/93" cabinet, pizza prep tables, 93" cabinet can accommodate (2) HS-5229 single overshelves |
| HS-5231 ^{*‡} | Single overshelf for 67" cabinet, pizza prep tables |
| HS-5228 ^{*‡} | Double overshelf for 46"/93" cabinet, pizza prep tables, 93" cabinet can accommodate (2) HS-5228 double overshelves |
| HS-5230 ^{*‡} | Double overshelf for 67" cabinet, pizza prep tables |

[†]Compatible with models manufactured since March 2016. (Serial # FXXXXXC and after)

[‡]Compatible with models manufactured since January 2017. (Serial # GXXXXXA and after)

^{*‡}93" cabinets can accommodate (2) HS5229 single overshelves or (2) HS-5228 double overshelves

Commercial Series Accessories

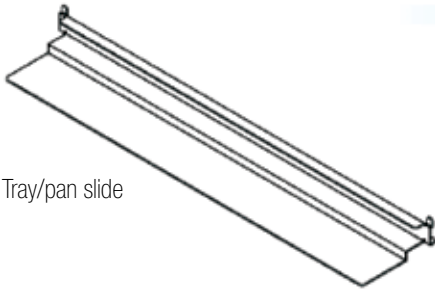

Tray/pan slide

*Tray/Pan slides: 16 sets on 3" centers per section is the recommended maximum capacity for uprights. Units can hold as many as 24 sets on 2" centers per section.

**Tray/Pan slides accommodate one Baker Pan: width 17-7/8" to 18" x length 25-3/4" to 26-7/8", or two Hotel Pans: width 12-7/8" to 13" x length 20-3/4" to 20-7/8".

| Part Number | Description |
|-----------------------------|--|
| TRAY/PAN SLIDES | |
| HS-3557 | Stainless steel bottom support universal pan slides (1 set)* |
| HS-3558 | Stainless steel bottom support universal pan slides (4 sets)* |
| HS-5092 | Stainless steel bottom support wire tray slides (1 set) medium duty for 18x26 Baker Pan (1/4 diameter and welded wire) |
| HS-5093 | Stainless steel bottom support wire tray slides (4 sets) medium duty for 18x26 Baker Pan (1/4 diameter and welded wire) |
| HS-5167 | Pan slide conversion kit 2-section S-Series (1 required per section)** |
| DOOR REVERSAL KITS | |
| HS-3725 | Door reversal kit, S-Series hinges, half door right to left, full door left to right |
| HS-3726 | Door reversal kit, S-Series hinges, half door left to right, full door right to left |
| HS-5176 | Door reversal kit, S-Series FGE hinges, full glass door, left to right |
| HS-5177 | Door reversal kit, S-Series FGE hinges, full glass door, right to left |
| AIR FILTERS | |
| HS-5007 | Air filter (1 section) |
| HS-5008 | Air filter (2 section) |
| HS-5009 | Air filter (2 section) |
| FLAT LIFT-OFF COVERS | |
| HS-5070 | Flat lift-off stainless steel cover for 12 pan Mega Top opening part numbers ending in -12M, (2) required for part numbers ending in -24M |
| HS-5071 | Flat lift-off stainless steel cover for 18 pan Mega Top opening part numbers ending in -18M |
| HS-5072 | Flat lift-off stainless steel cover for CRMR27-8, CRMR27-8D |
| HS-5073 | Flat lift-off stainless steel cover for CRMR48-8, CRMR60-8D |
| HS-5074 | Flat lift-off stainless steel cover for 12 pan Sandwich Top opening part numbers ending in -12 |
| HS-5106 | Flat lift-off stainless steel cover for CRMR60-16, CRMR72-16 |
| HS-5107 | Flat lift-off stainless steel cover for CRMR72-18 |
| HS-5070+ | Flat lift-off stainless steel cover for 12 or 18 pan Mega Top opening part numbers CRMR72-30M, CRMR72-30M6 |
| HS-5071 | |
| PREP GUARDS | |
| HS-5207 | Mega Top 12 pan prep guard for part numbers ending in -12M, -24M (requires 2 HS-5207 per unit), -30M (requires 1 HS-5207 & 1 HS-5213 per unit) |
| HS-5222 | Mega Top 15 pan prep guard for part numbers ending in -15M |
| HS-5213 | Mega Top 18 pan prep guard for part numbers ending in -18M, -30M (requires 1 HS-5207 & 1 HS-5213 per unit) |
| HS-5225 | Sandwich Top 6 pan prep guard for part numbers ending in -18 (requires 1 HS-5225 & 1 HS-5226 per unit) |
| HS-5220 | Sandwich Top prep guard for part number CRMR27-8 only |
| HS-5221 | Sandwich Top 8 pan prep guard for part numbers ending in -10 |
| HS-5223 | Sandwich Top 10 pan prep guard for part numbers ending in -8, -16 |
| HS-5226 | Sandwich Top 12 pan prep guard for part numbers ending in -12, -18 (requires 1 HS-5225 & 1 HS-5226 per unit) |

Commercial Series Accessories

| Part Number | Description |
|----------------------------------|---|
| COMPOSITE CUTTING BOARDS | |
| HS-5265 | 10" x 27" x 1/2" composite cutting board for 27" Sandwich & Mega Tops |
| HS-5266 | 10" x 36" x 1/2" composite cutting board for 36" Sandwich & Mega Tops |
| HS-5267 | 10" x 48" x 1/2" composite cutting board for 48" Sandwich & Mega Tops |
| HS-5268 | 10" x 60" x 1/2" composite cutting board for 60" Sandwich & Mega Tops |
| HS-5269 | 10" x 72" x 1/2" composite cutting board for 72" Sandwich & Mega Tops |
| HS-5270 | 19" x 46" x 1/2" composite cutting board for 46" Pizza Prep table |
| HS-5271 | 19" x 67" x 1/2" composite cutting board for 67" Pizza Prep table |
| HS-5272 | 19" x 92" x 1/2" composite cutting board for 93" Pizza Prep table |
| MISCELLANEOUS ACCESSORIES | |
| HS-4007 | Drawer assembly divider bar (accommodates 1/2, 1/3 and 1/6 size pans) for undercounters, worktops, prep tables with drawers & CRES models |
| HS-4009 | 12" rail divider bar for prep table |
| HS-5069 | Rail adapter bar (12.6" x 1.0" front to back) for Sandwich & Mega Tops |
| HS-5075 | Stainless back, 27" horizontal units (factory install only) for Sandwich & Mega Tops |
| HS-5076 | Stainless back, 48" horizontal units (factory install only) for Sandwich & Mega Tops |
| HS-5085 | Stainless back, 60" horizontal units (factory install only) for undercounters & worktops |
| HS-5086 | Stainless back, 72" horizontal units (factory install only) for Sandwich & Mega Tops |
| HS-5112 | Stacking kit for CRMR27 & CRMF27 undercounters |
| HS-5170 | Stainless back for 60" Sandwich & Mega Tops (factory install only) |
| HS-5184 | All Mega Tops divider front to back |
| HS-5185 | All Sandwich & Mega Tops 27-8 divider side to side (outer) |
| HS-5186 | Mega Top 18M & 30M divider side to side (center) |
| HS-5187 | Sandwich Top 27-8 divider front to back |
| HS-5188 | Sandwich Top 48-8 and 12, 16, 18 pan openings divider front to back |
| HS-5189 | Sandwich Top 48-8 and 12, 16, 18 pan openings divider side to side (outer) |
| HS-5190 | Sandwich Top 12 & 16 pan openings side to side (center) |
| HS-5191 | Sandwich Top 18 pan openings side to side (outer) |
| HS-5192 | Sandwich Top 18 pan openings side to side (center) |
| HS-5234 | Heated condensate pan kit for uprights |
| HS-5249 | Heated condensate pan kit for CPT, CRMF48/60 & CRMR60/72 |

www.lancer-direct.fastcooler.com

Your One-Stop Source for Walk-In Coolers!

This website has all the information you'll need to make an informed and intelligent decision when selecting a walk-in cooler:

- Buyer's Guide
- Online video and pdf Installation Guide
- *Cooler Connection*, the coolest blog in the Foodservice Industry!
- FAQ's
- E-mail link to ask specific questions
- Information about the manufacturer, U.S. Cooler
- Online purchasing 24-7

Here's a sample of what you'll find in our Buyer's Guide...

When making a decision which walk-in cooler or freezer to buy there are many things that must be considered. Our online Buyer's Guide will help you go through all these considerations...

WHAT IS IMPORTANT TO YOU

MATERIALS

INSULATION MATERIALS

1. Extruded Polystyrene
2. Polyurethane

METAL SKINS

1. G 90 Galvanized
2. Aluminum
3. Galvalume
4. Painted G90 Galvanized
5. Stainless Steel

REFRIGERATION SYSTEMS

1. Remote Systems
2. Pre-assembled Remote Systems
3. Standard Top Mount
4. Side Mount Refrigeration System
5. Saddle Mount Refrigeration System
6. Penthouse Refrigeration System
7. Roll Up Refrigeration System

OUTDOOR APPLICATIONS

WALK-IN COOLERS AND FREEZERS WITHOUT A FLOOR

MANUFACTURER

CONCLUSION

Cooler Connection, the coolest blog in the Foodservice Industry, will keep you informed with the latest cooler news: new products, preventative maintenance and fix-it tips, fact versus fiction information, "heads-up" information such as new U.S. Department of Energy (DOE) rulings, cooler parts and accessories, and much more!

EverCheck® is a registered trademarks of Hoshizaki America, Inc., Peachtree City, Georgia.

ENERGY STAR is a joint program of the U.S. Environmental Protection Agency and the U.S. Department of Energy helping us all save money and protect the environment through energy efficient products and practices.



5' x 7' Brew Cave



Walk-in cooler